

Synergy Scaffolding and Access Services is a privately owned Australian company, dedicated to comprehensive service and keeping our customers happy.

SYNERGY SCAFFOLDING AND ACCESS SERVICES

ALUMINIUM KWIKALLY KIT

259 Milperra Rd,
Revesby NSW 2212

33 Dunn St,
Rocklea QLD 4106

119 Studley Court,
Derrimut VIC 3030

17 Oxenham St,
Dudley Park SA 5008

3A Muriel St,
Bayswater WA 6053



1300 796 305




sales@ssaas.com.au

synergyaccessandscaffolding.com.au

ALUMINIUM KWIKALLY

Kwikally 7.5m Long 1.3m Wide 2.0m High using 2.5m Bays


KA-L7.5xW1.3xH2.0



MAIN GEAR LIST

Part No.	Description	Qty
KA-3.2DB	Diagonal Brace 3.2m	1
KA-2.0DB	Diagonal Brace 2.0m	2
KA-TBC	Toe Board Clips	6
KA-1.3L	Ledger 1.3 m	12
KA-2.5L	Ledger 2.5m	18
TSB-5001.1	Timber Sole Boards	8
KA-2.5x0.6PH	2500*600mm Hatch	6
KA-1.3TB	1280mm Toe Board	2
KA-2.5TB	2500mm Toe Board	3
KA-0.5S	Standard 0.5m	8
KA-2.0S	Standard 2.0m	2
KA-3.0S	Standard 3.0m	6
SBJ	Solid Base Jack	8

Total items Weight: 381.86kg

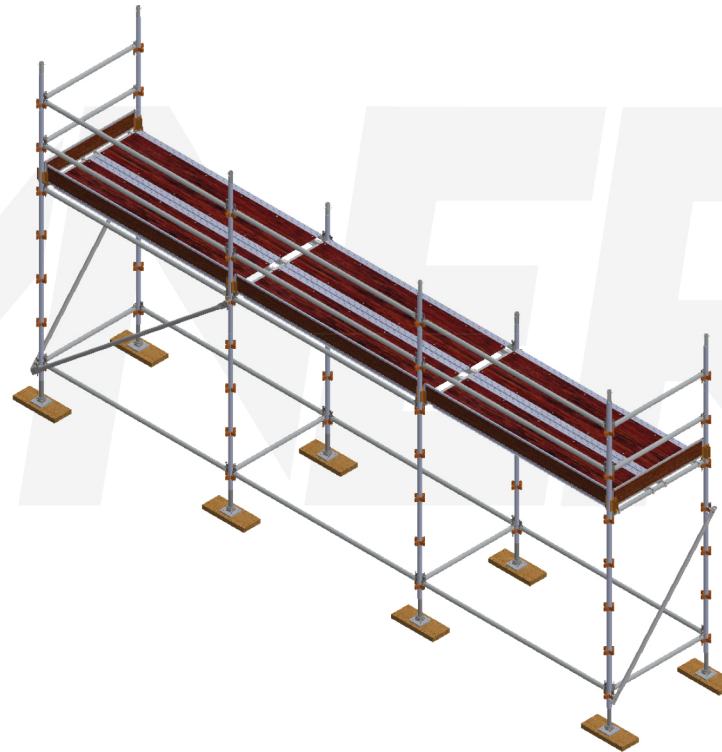

EXTRA GEAR LIST

KA-L7.5xW1.3xH2.0	CODE	DESCRIPTION	QTY PER LEVEL	LEVELS	TOTAL
TIES NO HOPUP	1500TUBE	1.5m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.3M HOPUP	KA-0.3BR	300 mm Hopup	4	1	4
	KA-2.5SP	2.5m Single Plank	3	1	3
0.3M HOPUP TIES	1800TUBE	1.8m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.5M HOPUP	KA-0.5BR	506 mm Hopup	4	1	4
	KA-2.5X0.3PH	2500*300 mm Platform	3	1	3
0.5M HOPUP TIES	2100TUBE	2.1m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.7M HOPUP	KA-0.7BR	680 mm Hopup	4	1	4
	KA-2.5X0.6PH	2500*600 mm Platform	3	1	3
0.7M HOPUP TIES	2400TUBE	2.4m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
LADDER	ALSCF36	3.6m Ladder	1	1	1
	DC	Doubles (90'z)	2	1	2
INTERNAL HANDRAIL	KA-2.5L	Ledger 2.5m	3	1	3
INTERNAL MIDRAIL	KA-2.5L	Ledger 2.5m	3	1	3
OUTRIGGERS	S3	Stabilizer 3.0m	3	1	3
INTERNAL TOEBOARD	KA-2.5TB	2500 mm Toe Board	3	1	3



ALUMINIUM KWIKALLY

Kwikally 7.5m Long 1.3m Wide 3.0m High using 2.5m Bays

KA-L7.5xW1.3xH3.0

EXTRA GEAR LIST


KA-L7.5xW1.3Hx3.0	CODE	DESCRIPTION	QTY PER LEVEL	LEVELS	TOTAL
TIES NO HOPUP	1500TUBE	1.5m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.3M HOPUP	KA-0.3BR	300 mm Hopup	4	1	4
	KA-2.5SP	2.5m Single Plank	3	1	3
0.3M HOPUP TIES	1800TUBE	1.8m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.5M HOPUP	KA-0.5BR	506 mm Hopup	4	1	4
	KA-2.5X0.3PH	2500*300 mm Platform	3	1	3
0.5M HOPUP TIES	2100TUBE	2.1m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
0.7M HOPUP	KA-0.7BR	680 mm Hopup	4	1	4
	KA-2.5X0.6PH	2500*600 mm Platform	3	1	3
0.7M HOPUP TIES	2400TUBE	2.4m Tube	2	1	2
	DC	Doubles (90'z)	4	1	4
	WBR	Wall Bracket	2	1	2
LADDER	ALSCF48	4.8m Ladder	1	1	1
	DC	Doubles (90'z)	2	1	2
INTERNAL HANDRAIL	KA-2.5L	Ledger 2.5m	3	1	3
INTERNAL MIDRAIL	KA-2.5L	Ledger 2.5m	3	1	3
OUTRIGGERS	S3	Stabilizer 3.0m	3	1	3
INTERNAL TOEBOARD	KA-2.5TB	2500 mm Toe Board	3	1	3

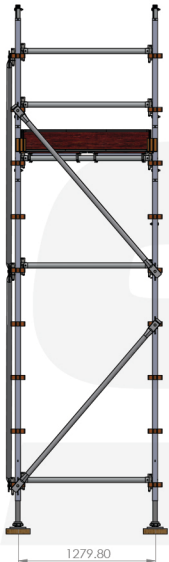

MAIN GEAR LIST

Part No.	Description	Qty
KA-3.2DB	Diagonal Brace 3.2m	2
KA-2.0DB	Diagonal Brace 2.0m	4
KA-TBC	Toe Board Clips	6
KA-1.3L	Ledger 1.3 m	16
KA-2.5L	Ledger 2.5m	24
TSB-5001.1	Timber Sole Boards	8
KA-2.5x0.6PH	2500*600mm Hatch	6
KA-1.3TB	1280mm Toe Board	2
KA-2.5TB	2500mm Toe Board	3
KA-0.5S	Standard 0.5m	2
KA-1.5S	Standard 1.5m	6
KA-3.0S	Standard 3.0m	8
SBJ	Solid Base Jack	8

Total items Weight: 441.14kg

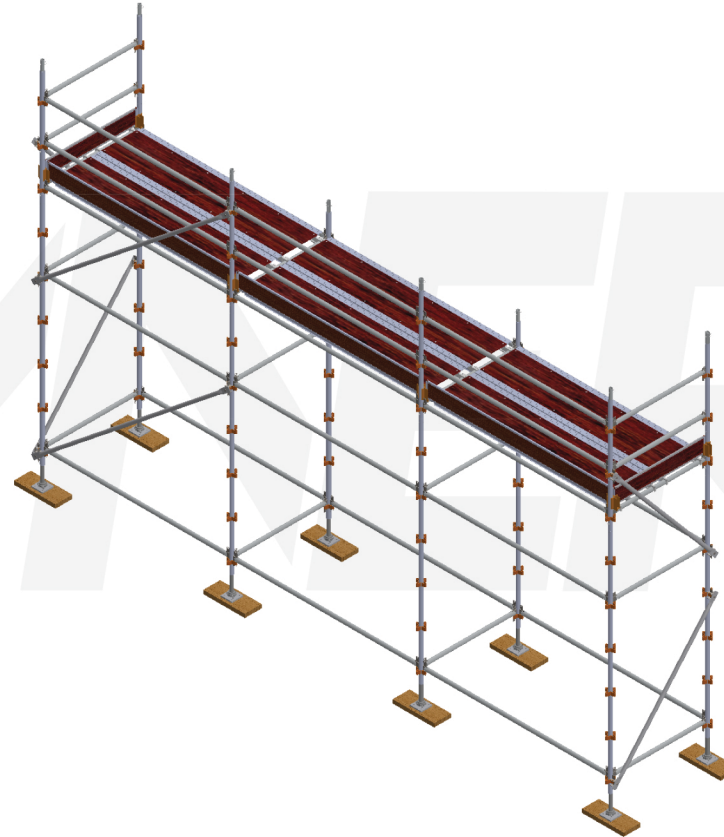

ALUMINIUM KWIKALLY

Kwikally 7.5m Long 1.3m Wide 4.0m High using 2.5m Bays

KA-L7.5xW1.3xH4.0



EXTRA GEAR LIST

KA-L7.5xW1.3xH4.0	CODE	DESCRIPTION	QTY PER LEVEL	LEVELS	TOTAL
TIES NO HOPUP	1500TUBE	1.5m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.3M HOPUP	KA-0.3BR	300 mm Hopup	4	2	8
	KA-2.5SP	2.5m Single Plank	3	2	6
0.3M HOPUP TIES	1800TUBE	1.8m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.5M HOPUP	KA-0.5BR	506 mm Hopup	4	2	8
	KA-2.5X0.3PH	2500*300 mm Platform	3	2	6
0.5M HOPUP TIES	2100TUBE	2.1m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.7M HOPUP	KA-0.7BR	680 mm Hopup	4	2	8
	KA-2.5X0.6PH	2500*600 mm Platform	3	2	6
0.7M HOPUP TIES	2400TUBE	2.4m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
LADDER	ALSCF36	3.6m Ladder	1	2	2
	DC	Doubles (90'z)	2	2	4
INTERNAL HANDRAIL	KA-2.5L	Ledger 2.5m	3	2	6
INTERNAL MIDRAIL	KA-2.5L	Ledger 2.5m	3	2	6
OUTRIGGERS	S3	Stabilizer 3.0m	3	1	3
INTERNAL TOEBOARD	KA-2.5TB	2500 mm Toe Board	3	2	6



MAIN GEAR LIST

Part No.	Description	Qty
KA-3.2DB	Diagonal Brace 3.2m	2
KA-2.0DB	Diagonal Brace 2.0m	6
KA-TBC	Toe Board Clips	12
KA-1.3L	Ledger 1.3 m	20
KA-2.5L	Ledger 2.5m	30
TSB-5001.1	Timber Sole Boards	8
KA-2.5x0.6PH	2500*600mm Hatch	12
KA-1.3TB	1280mm Toe Board	4
KA-2.5TB	2500mm Toe Board	6
KA-0.5S	Standard 0.5m	6
KA-1.5S	Standard 1.5m	2
KA-2.0S	Standard 2.0m	2
KA-3.0S	Standard 3.0m	8
SBJ	Solid Base Jack	8

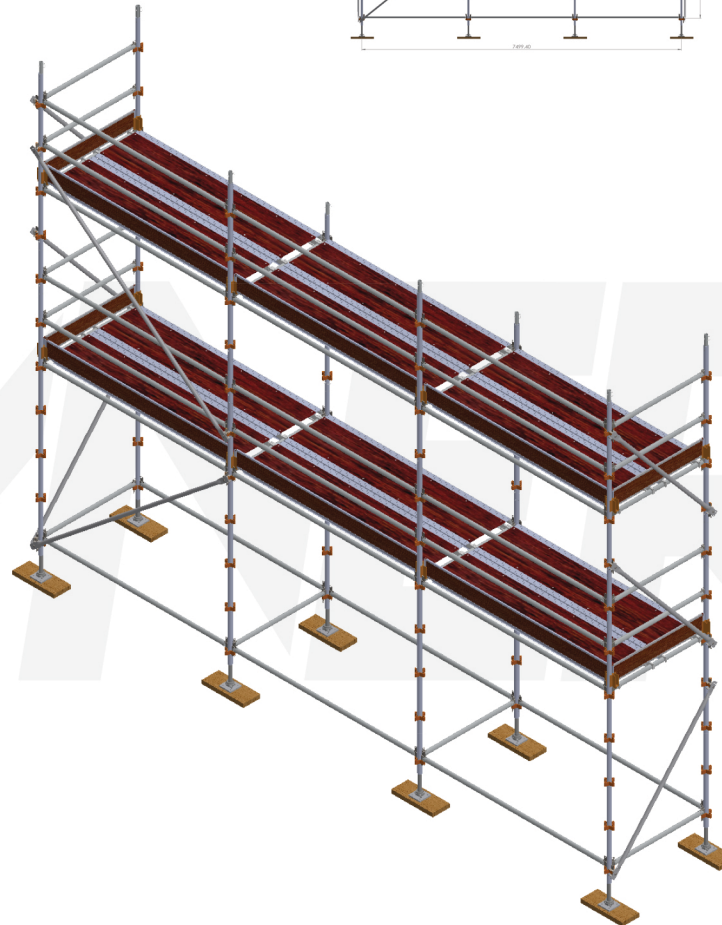

Total items Weight: 613.62kg


ALUMINIUM KWIKALLY

Kwikally 7.5m Long 1.3m Wide 5.0m High using 2.5m Bays

KA-L7.5xW1.3xH5.0



EXTRA GEAR LIST

KA-7.5xW1.3H5.0	CODE	DESCRIPTION	QTY PER LEVEL	LEVELS	TOTAL
TIES NO HOPUP	1500TUBE	1.5m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.3M HOPUP	KA-0.3BR	300 mm Hopup	4	2	8
	KA-2.5SP	2.5m Single Plank	3	2	6
0.3M HOPUP TIES	1800TUBE	1.8m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.5M HOPUP	KA-0.5BR	506 mm Hopup	4	2	8
	KA-2.5X0.3PH	2500*300 mm Platform	3	2	6
0.5M HOPUP TIES	2100TUBE	2.1m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
0.7M HOPUP	KA-0.7BR	680 mm Hopup	4	2	8
	KA-2.5X0.6PH	2500*600 mm Platform	3	2	6
0.7M HOPUP TIES	2400TUBE	2.4m Tube	2	2	4
	DC	Doubles (90'z)	4	2	8
	WBR	Wall Bracket	2	2	4
LADDER	ALSCF48	4.8m Ladder	1	1	1
	ALSCF36	3.6m Ladder	1	1	1
	DC	Doubles (90'z)	2	2	4
INTERNAL HANDRAIL	KA-2.5L	Ledger 2.5m	3	2	6
INTERNAL MIDRAIL	KA-2.5L	Ledger 2.5m	3	2	6
OUTRIGGERS	S5	Stabilizer 5.0m	3	1	3
INTERNAL TOEBOARD	KA-2.5TB	2500 mm Toe Board	3	2	6



MAIN GEAR LIST

Part No.	Description	Qty
KA-3.2DB	Diagonal Brace 3.2m	2
KA-2.0DB	Diagonal Brace 2.0m	6
KA-TBC	Toe Board Clips	12
KA-1.3L	Ledger 1.3 m	24
KA-2.5L	Ledger 2.5m	36
TSB-5001.1	Timber Sole Boards	8
KA-2.5x0.6PH	2500*600mm Hatch	12
KA-1.3TB	1280mm Toe Board	4
KA-2.5TB	2500mm Toe Board	6
KA-0.5S	Standard 0.5m	8
KA-2.0S	Standard 2.0m	2
KA-3.0S	Standard 3.0m	14
SBJ	Solid Base Jack	8

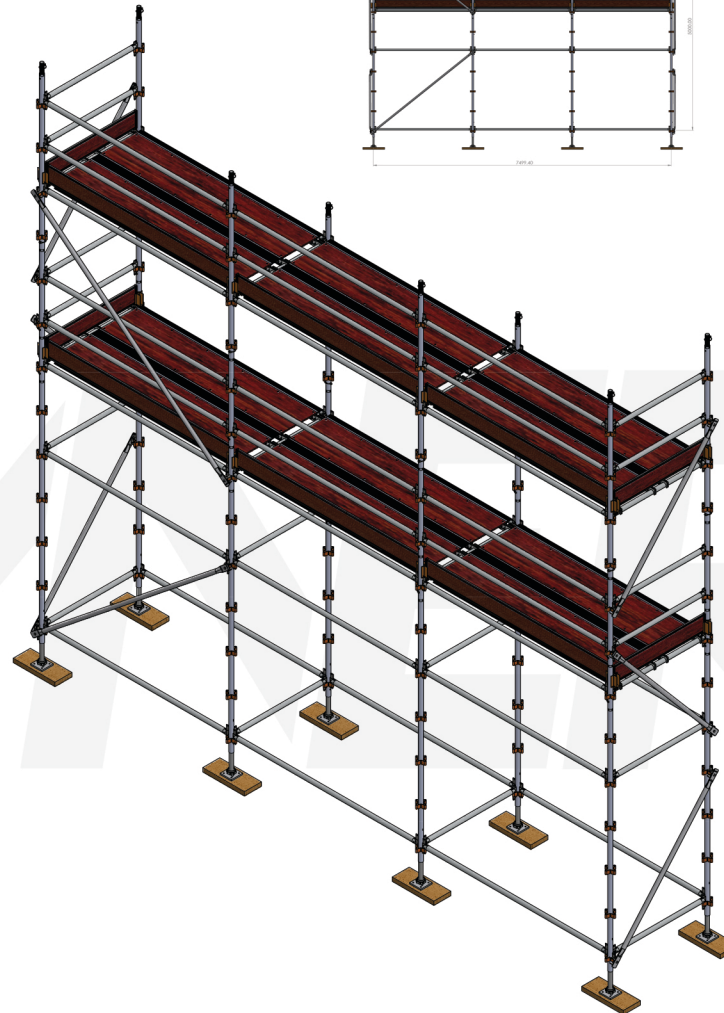

Total items Weight: 668.82kg


ALUMINIUM KWIKALLY

Kwikally 7.5m Long 1.3m Wide 6.0m High using 2.5m Bays

KA-L7.5xW1.3xH6.0

EXTRA GEAR LIST

KA-L7.5xW1.3Hx6.0	CODE	DESCRIPTION	QTY PER LEVEL	LEVELS	TOTAL
TIES NO HOPUP	1500TUBE	1.5m Tube	2	3	6
	DC	Doubles (90'z)	4	3	12
	WBR	Wall Bracket	2	3	6
0.3M HOPUP	KA-0.3BR	300 mm Hopup	4	3	12
	KA-2.5SP	2.5m Single Plank	3	3	9
0.3M HOPUP TIES	1800TUBE	1.8m Tube	2	3	6
	DC	Doubles (90'z)	4	3	12
	WBR	Wall Bracket	2	3	6
0.5M HOPUP	KA-0.5BR	506 mm Hopup	4	3	12
	KA-2.5X0.3PH	2500*300 mm Platform	3	3	9
	2100TUBE	2.1m Tube	2	3	6
0.5M HOPUP TIES	DC	Doubles (90'z)	4	3	12
	WBR	Wall Bracket	2	3	6
	KA-0.7BR	680 mm Hopup	4	3	12
0.7M HOPUP	KA-2.5X0.6PH	2500*600 mm Platform	3	3	9
	2400TUBE	2.4m Tube	2	3	6
0.7M HOPUP TIES	DC	Doubles (90'z)	4	3	12
	WBR	Wall Bracket	2	3	6
	LADDER	ALSCF36	3.6m Ladder	1	3
INTERNAL HANDRAIL	DC	Doubles (90'z)	2	3	6
	KA-2.5L	Ledger 2.5m	3	3	9
INTERNAL MIDRAIL	KA-2.5L	Ledger 2.5m	3	3	9
OUTRIGGERS	S5	Stabilizer 5.0m	3	1	3
INTERNAL TOE BOARD	KA-2.5TB	2500 mm Toe Board	3	3	9



MAIN GEAR LIST

Part No.	Description	Qty
KA-3.2DB	Diagonal Brace 3.2m	3
KA-2.0DB	Diagonal Brace 2.0m	8
KA-TBC	Toe Board Clips	18
KA-1.3L	Ledger 1.3 m	28
KA-2.5L	Ledger 2.5m	42
TSB-5001.1	Timber Sole Boards	8
KA-2.5x0.6PH	2500*600mm Hatch	18
KA-1.3TB	1280mm Toe Board	6
KA-2.5TB	2500mm Toe Board	9
KA-0.5S	Standard 0.5m	2
KA-1.5S	Standard 1.5m	6
KA-3.0S	Standard 3.0m	16
SBJ	Solid Base Jack	8

Total items Weight: 861.36kg

